


Double fork positioner for 1-2 pallets

DPK-C


The double fork positioner DPK-C can, through hydraulic fork positioning, pick up one or two pallets. The distance between the pallets can be reduced to zero. The strong frame construction maximises service life and safe working. The compact design gives excellent visibility.

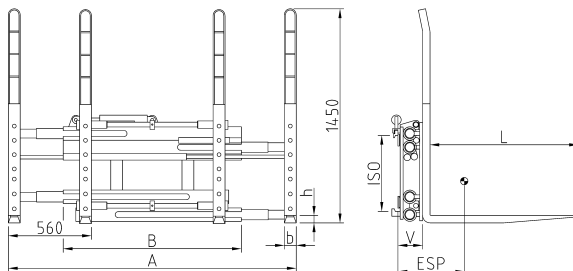

type	capacity kg/mm LC	lift truck capacity tons	ISO	B mm	A mm	b x h x l mm	ESP C06 mm	V LLC mm	weight kg	sideshift mm
DPK 16 C	1600/600	1,5-1,8	II	1050	560-1790	80x40x1200	240	165	475	+/- 100
DPK 22 C	2200/600	2,0-2,5	II	1200	560-1940	80x40x1200	260	165	495	+/- 100
DPK 25 C	2500/600	2,5	II	1200	560-1940	80x50x1200	260	165	535	+/- 100
DPK 30 C	2600/600	3	III	1200	560-1940	80x50x1200	250	165	540	+/- 100
DPK 30 C2	2600/600	3	III	1200	660-2140	80x50x1200	250	165	565	+/- 100
DPK 35 C	3200/600	3,5-4	III	1200	560-1940	80x60x1200	230	185	635	+/- 100
DPK 35 C2	3200/600	3,5-4	III	1300	660-2140	80x60x1200	230	185	670	+/- 100
DPK 40 C	4500/600	5/500	III	1400	560-1940	80x60x1200	215	195	750	+/- 100
DPK 40 C2	4500/600	5/500	III	1400	660-2140	80x60x1200	210	195	780	+/- 100

- 2 hydraulic functions
- includes hoses and couplings
- automatic lubrication system
- see accessories

DPK 30 C

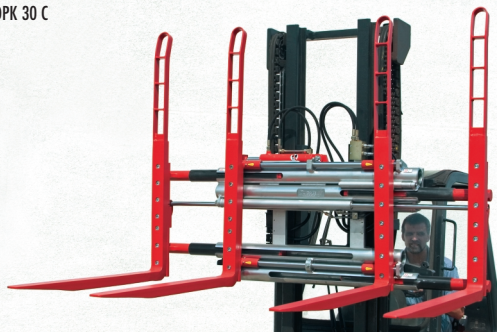

DURWEN
Anbaugeräte für Gabelstapler

Kompetenz seit mehr als 50 Jahren